

# PR12-1200-L2 12.8V 1200 CCA

Lithium Iron Phosphate (LiFePO4) Battery

### GO SMARTER

Active intelligent monitoring. At The heart of SureStart Lithium battery is an integrated management system that monitors and reacts to multiple voltage, current, and temperature events to maximize performance, battery life and safety.

# GO SAFER

Lithium Iron Phosphate (LiFePO4) is the safest type of lithium battery and a ready to go replacement and upgrade from lead acid, AGM or gel.

### GO FASTER

4X lighter 4X faster charge time

# **GO LONGER**

4X longer life

4X the warranty

# PERFORMANCE SPECIFICATIONS

**Nominal Voltage** 12.8 V **Watt-Hour** 512 Wh **Discharge** 1200A **Approximate Weight** 5.4kg

**Initial Impedance** <10milliohms >= 4000 **Cycle Life** Charge Retention (Shelf life) (at >= 99.9%

68°F/20°C) 1Month

**Operating Temperature Range** 

1.4°F (-17°C) to 186°F (85°) **Charge Discharge** 5°F (-15°C) to 149°F (65°C) 32°F (0°C) to 86°F (30°C) **Storage** 

230°C heat resistant case and cover UL94-V0 flammability Case



# **DIMENSIONS:**










# PR12-1200-L2

12.8V 1200 CCA

Lithium Iron Phosphate (LiFePO4) Battery

#### **DISCHARGING CHART**

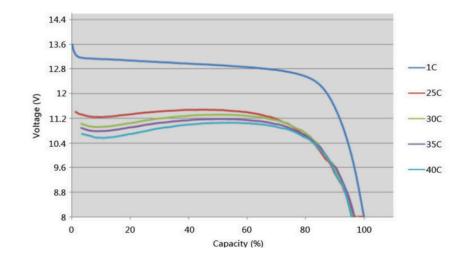

# **CHARGING**

The battery can be used if the voltage is higher or equal to 12.8V, although we recommend fully charging the battery if the voltage is below 13.0V. Apply constant voltage charge between 14.4V and 14.8V to fully charge the battery.

The SureStart series requires Lithium compatible chargers and testers. We do not recommend the use of lead acid chargers as many in the market are not suitable for Lithium Iron Phosphate batteries.

#### WARRANTY

Designed and engineered at our ISO 9001:2001 certified factories. All batteries are subject to stringent quality control through every step of the manufacturing process, ensuring both consistency and reliability. The SureStart series is backed by a 5-year limited warranty.



